

78M08


Three-terminal Positive Voltage Regulator

TO-251




Features

- ❖ Maximum Output current
 I_{OM} : 0.5 A
- ❖ Output voltage
 V_O : 8V
- ❖ Continuous total dissipation
 P_D : 1.25 W ($T_a = 25^\circ C$)

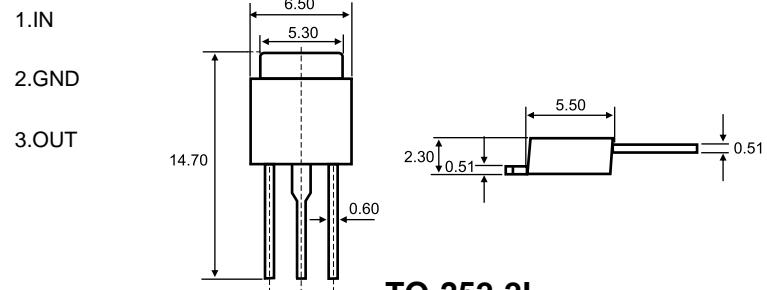

TO-252-2L

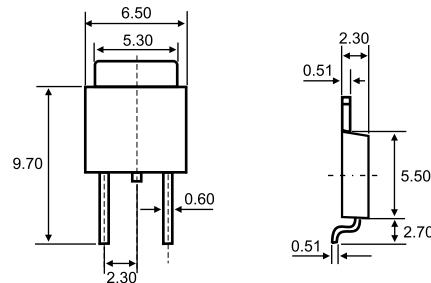

Dimensions in inches and (millimeters)


ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

| Parameter | Symbol | Value | Unit |
|---|-----------|---------|------|
| Input Voltage | V_I | 35 | V |
| Operating Junction Temperature Range | T_{OPR} | 0+125 | °C |
| Storage Temperature Range | T_{STG} | -65+150 | °C |

ELECTRICAL CHARACTERISTICS (Vi=14V, Io=350mA, Ci=0.33μF, Co=0.1μF, unless otherwise specified)

| Parameter | Symbol | Test conditions | MIN | TYP | MAX | UNIT |
|---------------------------------|--------------|---|---------|-----|-----|------|
| Output voltage | V_o | | 25°C | 7.7 | 8 | 8.3 |
| | | 10.5≤ V_i ≤23V, Io =5mA-350mA P_o ≤15W | 0-125°C | 7.6 | 8 | 8.4 |
| Load Regulation | ΔV_o | Io =5mA-500mA | 25°C | | 20 | mV |
| | | Io =5mA-200mA | 25°C | | 10 | mV |
| Line regulation | ΔV_o | 10.5V≤ V_i ≤25V, Io =200mA | 25°C | | 6 | mV |
| | | 11V≤ V_i ≤25V, Io =200mA | 25°C | | 2 | mV |
| Quiescent Current | I_q | | 25°C | | 4.6 | mA |
| Quiescent Current Change | ΔI_q | 10.5V≤ V_i ≤25V, Io =200mA | 0-125°C | | 0.8 | mA |
| | ΔI_q | 5mA≤ I_o ≤350mA | 0-125°C | | 0.5 | mA |
| Output Noise Voltage | V_N | 10Hz≤f≤100KHz | 25°C | | 52 | uV |
| Ripple Rejection | RR | 11.5V≤ V_i ≤21.5V, f=120Hz, Io =300mA | 0-125°C | 56 | 80 | dB |
| Dropout Voltage | V_d | Io =350mA | 25°C | | 2 | V |
| Short Circuit Current | I_{sc} | V_i =14V | 25°C | | 250 | mA |
| Peak Current | I_{pk} | | 25°C | | 0.7 | A |

TYPICAL APPLICATION

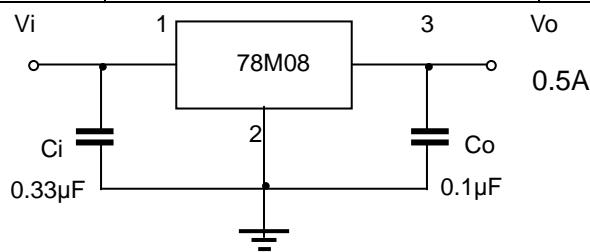


78M08


Three-terminal Positive Voltage Regulator

Typical Characteristics


Ambient temperature VS
Output voltage

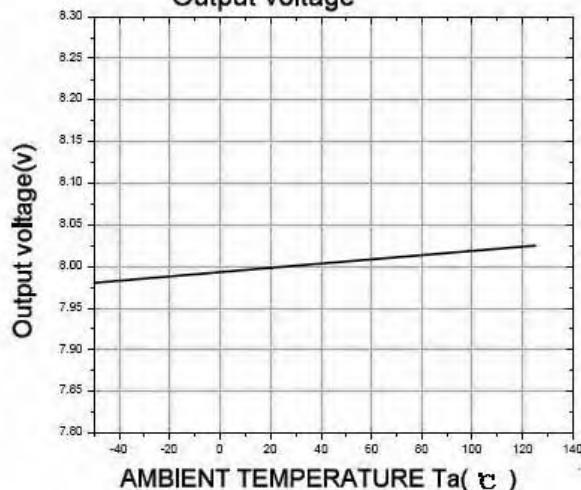

Input voltage VS
Output voltage($T_j=25\text{ }^\circ\text{C}$)

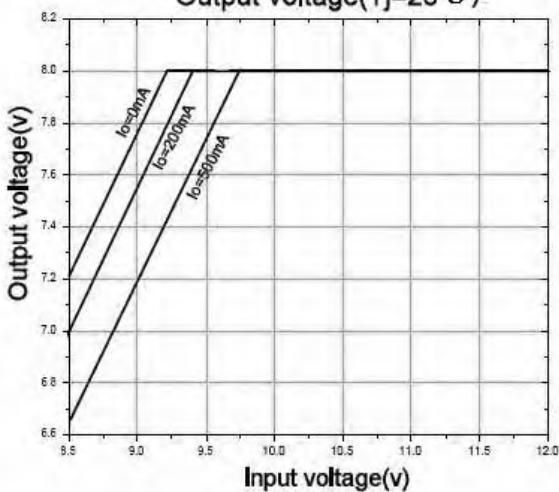

Input voltage VS
Quiescent current($T_j=25\text{ }^\circ\text{C}$)

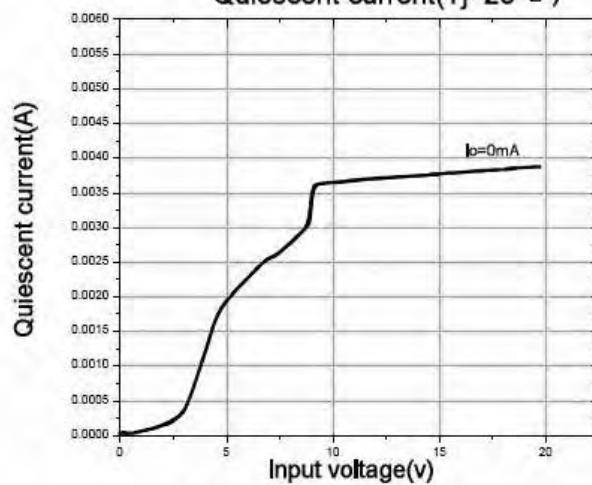

Input voltage VS
Input current($T_j=25\text{ }^\circ\text{C}$)

