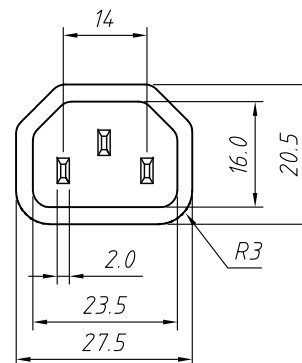
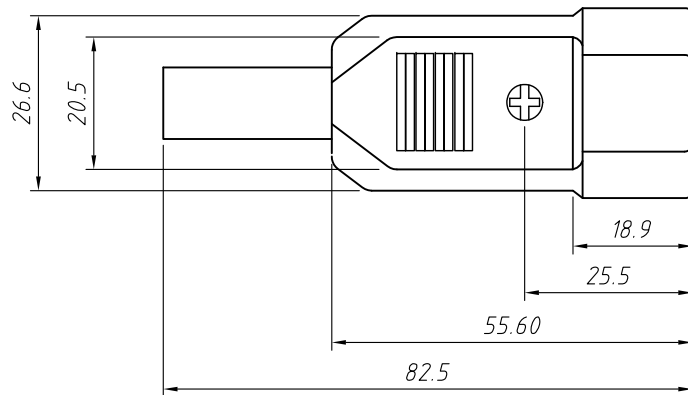


Material

Housing: PBT UL 94V-0 or

PA66/PC UL 94V-0

Terminal: Brass ,plating Ni.

Electrical

Standard: IEC 60320 C8

Voltage rating: 250V AC

Rating: 250VAC 10A (2.5A)

Insulation Resistance: 100MΩ 500V DC / 1 minute

Dielectric Strength: 2000V AC / 1 minute

Mechanical

Temp. Range: -45 °C ~ +105 °C

Order Information

L -KLS1- ASS-202

AC Inlet Type

Pos. NO.

RoHS

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:		
X. ±0.60		X. ±5°		UNITS	mm	Ac Plug Connector With Straight Male Tyep KLS1-ASS-202		
.X ±0.38		.X ±3°		SHEET SIZE	A4			
.XX ±0.25		.XX ±2°			KLS P/N:			
Draw by: Date		2015-09-01			NingBo KLS ELECTRONIC CO.,LTD.			
Check by:: Date		2015-09-15						
SCALE		SHEET						